



### Model number


#### VAA-4E4A-KE1-Z/E2

KE1 switch cabinet module  
4 inputs and 4 outputs


### Features

- Housing with removable terminals
- Communication monitoring
- Inputs for 2-wire sensors and mechanical contacts
- Addressing jack
- Power supply of the inputs and outputs from the external auxiliary voltage
- Function display for bus, ext. auxiliary voltage, inputs and outputs


### Dimensions

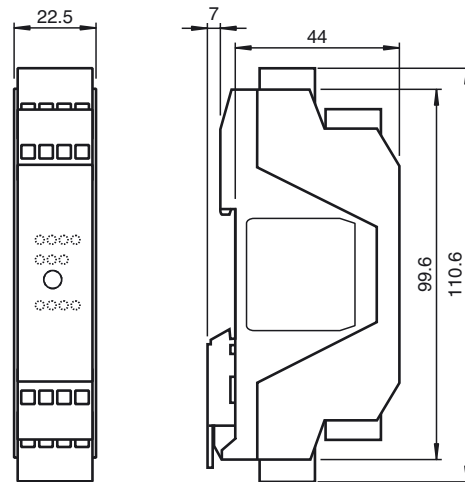

### Electrical connection

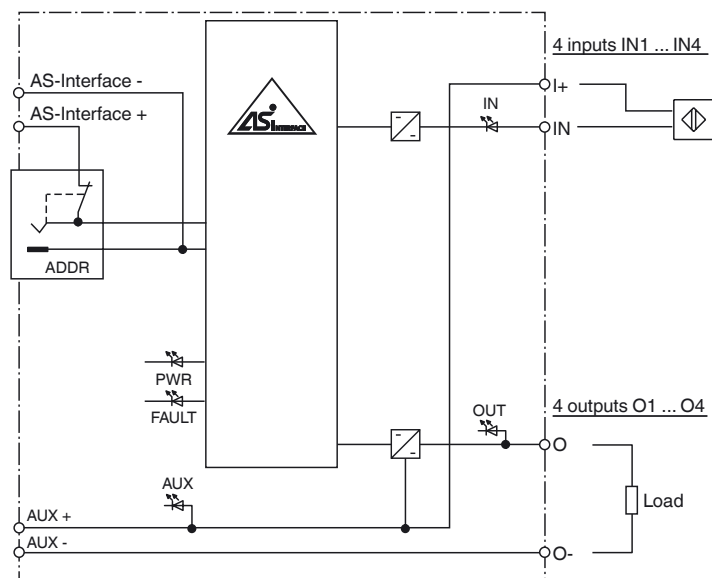

### Indicating / Operating means

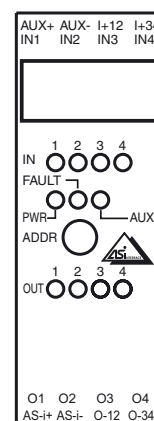

## Technical data

## General specifications

Slave type	Standard slave
AS-Interface specification	V3.0
Required master specification	≥ V2.0
UL File Number	E87056

## Functional safety related parameters

MTTF <sub>d</sub>	90 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	0 %

## Indicators/operating means

LED FAULT	error display; LED red red: communication error or address is 0 red flashing: overload of outputs
LED PWR	AS-Interface voltage; LED green
LED AUX	ext. auxiliary voltage U <sub>AUX</sub> ; dual LED green/red green: voltage OK red: reverse voltage
LED IN	switching state (input); 4 LED yellow
LED OUT	Switching state (output); 4 LED yellow

## Electrical specifications

Auxiliary voltage (output)	U <sub>AUX</sub>	20 ... 30 V DC PELV
Rated operating voltage	U <sub>e</sub>	26.5 ... 31.6 V from AS-Interface
Rated operating current	I <sub>e</sub>	≤ 40 mA
Protection class		III
Surge protection		U <sub>AUX</sub> , U <sub>in</sub> : Over voltage category III, safe isolated power supplies (PELV)

## Input

Number/Type	4 inputs for 2-wire sensors (PNP), DC or for mechanical contacts
Supply	from external auxiliary voltage U <sub>AUX</sub>
Input current	≤ 8 mA (limited internally)
Switching point	according to DIN EN 61131-2 (Type 2)
0 (unattenuated)	≤ 2 mA
1 (attenuated)	≥ 4 mA
Signal delay	< 2 ms (input/AS-Interface)
Signal frequency	≤ 250 Hz

## Output

Number/Type	4 electronic outputs, PNP, overload and short-circuit proof
Supply	from external auxiliary voltage U <sub>AUX</sub>
Current	0.5 A per output, 2 A per module
Voltage	≥ (U <sub>AUX</sub> - 0.5 V)
Usage category	DC-13

## Programming instructions

Profile	S-7.0
IO code	7
ID code	0
ID1 code	F
ID2 code	E

Data bits (function via AS-Interface)	input	output
D0	IN1	O1
D1	IN2	O2
D2	IN3	O3
D3	IN4	O4

## Parameter bits (programmable via AS-i) function

P0	Communication monitoring P0 = 0 monitoring = off, the outputs maintain the status if communication fails P0 = 1 monitoring = on, i.e. if communication fails, the outputs are deenergised (default settings)
P1	Input filter P1 = 0 input filter on, pulse suppression ≤ 2 ms P1 = 1 input filter off (default settings)
P2	Synchronous mode P2 = 0 synchronous mode on P2 = 1 synchronous mode off (default settings)
P3	not used

## Ambient conditions

Ambient temperature	-25 ... 60 °C (-13 ... 140 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Relative humidity	90 %, noncondensing
Pollution degree	2

## Mechanical specifications

Degree of protection	IP20
----------------------	------

## Function

The AS-Interface Module VAA-4E4A-KE1-Z/E2 is a control cabinet with 4 inputs and 4 electronic outputs. The housing, only 22.5 mm in width and 48.5 mm in height, takes up little place in the switch cabinet. The module features an integrated addressing jack is mounted by snapping onto the 35 mm DIN rail in accordance with EN 50022.

For easy disconnection for commissioning and servicing, the connection is via plug-in black 4-pin spring terminals.

The external auxiliary voltage, the AS-Interface cable, the inputs and outputs (IN and O), as well as the plus potential of the inputs (I+) and the minus potential of the outputs (O-) are connected with the module via double terminals.

The inputs and outputs and the connected sensors and actuators are supplied via external auxiliary power U<sub>AUX</sub>. Polarity reversal is signalled by a red light on the AUX-LED.

The current switching status is indicated for each input and output by means of an LED on the top of the module.

## Note:

The device features communication monitoring. It switches off the power to the outputs when no communication has occurred on the AS-Interface cable for more than 40 ms.

In the event of overloading of the outputs, e.g. due to short-circuiting, the FAULT-LED on the module flashes and a signal is communicated to the AS-Interface master via the "Peripheral error" function. Communication via the AS-Interface remains uninterrupted.

## Accessories

## VBP-HH1-V3.0-KIT

AS-Interface Handheld with accessory

## VBP-HH1-V3.0

AS-Interface Handheld

## VAZ-PK-1,5M-V1-G

Adapter cable module/hand-held programming device

Connection	removable spring double terminals rated connection capacity: rigid/flexible (with and without wire-end ferrules): 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> recommended tools for 1.5 mm <sup>2</sup> : PxC CRIMPFOX ZA3 or Weid- müller PZ 6 roto
------------	--

## Material

Housing	PA 66-FR
---------	----------

Mass	80 g
------	------

Mounting	DIN mounting rail
----------	-------------------

**Compliance with standards and directives**

## Directive conformity

EMC Directive 2004/108/EC	EN 50295:1999
---------------------------	---------------

## Standard conformity

Noise immunity	EN 61326-1:2006
----------------	-----------------

Emitted interference	EN 55011:2009
----------------------	---------------

Input	EN 61131-2:2007
-------	-----------------

Degree of protection	EN 60529:2000
----------------------	---------------

Fieldbus standard	EN 50295:1999, IEC 62026-2:2006
-------------------	---------------------------------

**Notes**

Do not connect inputs and outputs, which are supplied via the module from AS-interface or via auxiliary power, with power supply and signal circuits with external potentials.